

Gateway

GW Router + nat + Failover

Defaults for Jade Networks products,
IP : 10.0.100.1, Password : jade

or

Connect a monitor and a keyboard to the device and boot device in "Reset to defaults" mode and follow the instruction on screen.

Note : Change the default password as soon as possible.

Minimal requirement for all Jade's software. Windows 2k and up.
Install Viprin.exe on your windows computer, follow on screen installation interactions.


Connect to your Gateway device with Gateway.exe.

Changing the IP address via Gateway.exe

Connect the your device, click menu/Tools/Change IP address.

Configure Wan Side. click Menu/Config/Add Remove IP.
Click on Wan button
Select Wan config as Static, Dhcp or Pppoe.
Fill the required info,
For Static, enter IP address, netmask and gateway as needed.
Pppoe, enter login name and password.
ie: login = > johndoe@YourIspDomain.com

Add / Delete Address

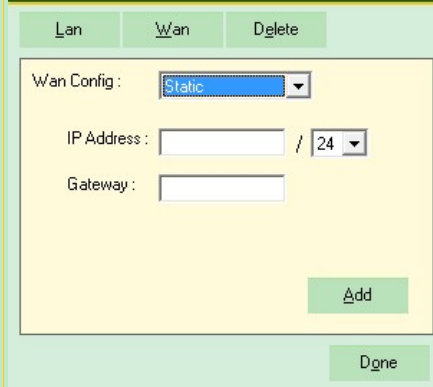

Wan Config :

IP Address : /


Gateway :

Manage Dns Servers

click Menu/Config/Dns Management
Type in Dns IP address and click Add. You can add multiple Dns IP address as wished. Click Done.

Quick Start Guide

Lan configurations are basically the same as for the Wan. One option more is available, multiple IP addresses can be added to a single port and build new routes if wished/needed.

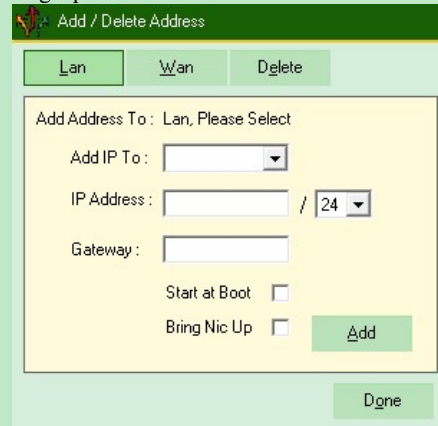

Add / Delete Address

Add Address To : Lan, Please Select

Add IP To :

IP Address : /

Gateway :


Start at Boot

Bring Nic Up

Note: You cannot manage the nic/IP that you are connected to. First, configure another nic or add an IP address, then connect to that new IP.

Manage Ports

Enabling / Disabling / Start / Stop ports.
Click Menu/Config/Manage Nics

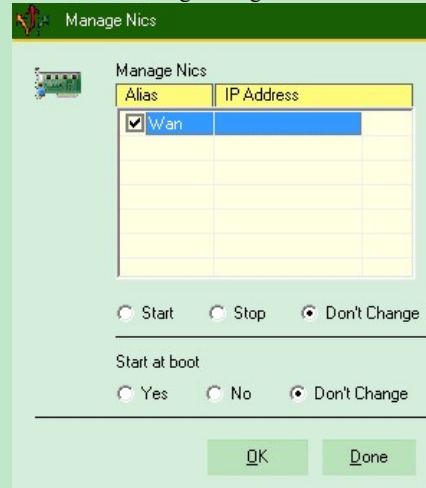

Manage Nics

Alias	IP Address
<input checked="" type="checkbox"/> Wan	
<input type="checkbox"/>	
<input type="checkbox"/>	
<input type="checkbox"/>	
<input type="checkbox"/>	

Start
 Stop
 Don't Change

Start at boot

Yes
 No
 Don't Change

Routing

Multiple uplink routes can be created.
Click Menu/Config/Routing or ctrl+r
Type in the IP address and select mask.
All uplinks are available in the Gateway drop down box, select.

DNS Management

Add Dns Server :

DNS Address :

Inserted Dns Server(s):

8.8.8.8

Host Name (optional)

Add / Delete Route

Add Route

IP Address : /

Gateway :

Security Fechers

click Menu/Security/Remote Access

Select from where incoming connections are allowed.

If you have selected the port that you are connected to, the device will block you from connecting. No worry, if so the device will automatically revert to previous configurations.

Remote Access

Deny Access to this Device Incoming From

Wan Dmz

Lan-0 Lan-1

Lan-2 Lan-3

Lan-4 Lan-5

Lan-6

Redundancy

Very simple, follow instructions on screen.

Sms capable.

Fail Over

1

Server Tag :

Security Key :

Products

[Bandwidth controler\(JTC\)](#)
[Bridge+Firewall](#)
[Spam Filter](#)
[Router+Nat\(Gateway\)](#)
[Device On Demand](#)
[Barbwire Firewall](#)

Upcoming

WLB, Wan Load Balancer(isp)
 SLB, Server Load Balancer(lan, wan)
 Pppoe Server
 Email Server

Support

By email

[Info](#)
[Sales and Quotes](#)
[Resellers](#)
[Device On Demand](#)
[Press](#)
 Technical assistance

Investor Relations Department

[Investors Email Form](#)

Contact Us

Jade Networks
 253 5e Rue de la Pointe
 Shawinigan, Quebec
 Canada G9N-1E2
 CDN / USA : 1 855 588 3360

[World Wide Contacts](#)

Stay Tuned

Facebook
 Twitter

Jade Networks©
 All rights reserved 2016